

### DESCRIPTION

The new EAW Commercial CXA80 power amplifier features a flexible input/output design that makes it ideal for stand-alone operation as well as a convenient solution where additional system zones need to be added. Specifically intended for a wide variety of installation applications, CXA80 is outfitted with both a standard audio input as well as a dedicated priority input, combining to make them very cost-effective two-input by one-output units.


Two combination mic/line inputs are actively balanced, with individual adjustable potentiometers for line level input, mic level input, and mic level input with 24-volt DC phantom power. Input 1 and the priority input are divided into four discrete input sections: a combination XLR/TRS connector, Phoenix connector, or barrier strip. Meanwhile, a Parallel output provides handy “loop-through” capability - the means to pass un-amplified line level signals downstream to additional amplifiers via barrier strip, Phoenix, 1/4-inch or XLR outputs.

Priority announcements can be initiated with external contact closures or adjustable signal threshold levels. External volume control is also possible through a Phoenix connector as well as a user-supplied potentiometer. Further, a two-position Phoenix connector allows the internal fault relay to be connected to redundant systems.

Front panel controls include low and high EQ controls which offer 12 dB of boost or cut at 100 Hz and 10 kHz, respectively. A master volume control offers output volume control, while distinctive LEDs indicate power (green), signal (amber), overload (red), and fault (red).

The CXA80 provides 80 watts of output power at 100 volts, 70.7 volts, 25 volts and 4 Ohms. An intelligent output stage is fully protected against permanent damage caused by overloading, shorts and thermal faults.

CXA80 operates on 100 volts to 240 volts AC (50/60 Hz) and is supplied by a detachable IEC power cord. A combination banana plug/binding post connection is also provided for connecting an external 24-volt DC backup battery.

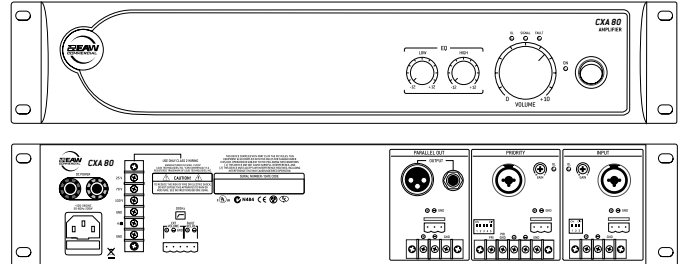

### Features

- Two combination 1/4-inch/XLR/Phoenix, or barrier strip Mic/Line inputs
- One parallel output on barrier strip, Phoenix, 1/4-inch or XLR
- Selectable 24-volt phantom power
- Dedicated priority input
- Internal fault-activated relay
- External volume control
- 4-Ohm, 25-volt, 70-volt and 100-volt outputs
- Automatic changeover to 24-volt DC backup power
- Universal power supply

### Applications

- Paging Systems
- Hotel and Ballrooms
- Schools
- Foreground/Background Music Systems
- Houses of Worship
- Meeting Rooms
- Offices



# CXA80

## 2 INPUT X 1 OUTPUT 80 W POWER AMPLIFIER

### PERFORMANCE

Inputs	Impedance	
Mic	Balanced, 2.7k Ohm	
Line	Balanced, 30k Ohm	
Input Protection	RFI and Level Protected	
Input Gain Trim Range	-3dB to 40dB (Mic Input) -23dB to 20dB (Line input)	
Max Input Level	+19dBV	
Microphone Input E.I.N. (20Hz – 20kHz)	-124dBV	
Common Mode Rejection Ratio (1kHz)	Mic Input: 60dB Typical Line Input: 30dB Typical	
Dynamic Range	105dB	
Frequency Response	20Hz – 20kHz +/-1dB	
Distortion	<0.1% 20Hz – 20kHz	
Operating Range (+0dB/- 3dB)	40Hz – 15kHz	
Output Power	80W @ 100V 80W @ 70.7V 80W @ 25V 80W @ 4 Ohm	
PHYSICAL		
Front Controls		
	Type	Range
EQ	Lo High	+/- 12dB @ 100Hz +/- 12dB @ 10 kHz
Volume	Level	0 to 10
Power	AC Mains	On/Off

### Rear Controls

	Inputs 1-2	Type	Range
		Trim Pot	3dB to 40dB (Mic Input) -23dB to 20dB (Line Input)
	Input 1	DIP	Parallel Enable, High-Pass Filter, 10 dB Pad
	Input 2	DIP	Line, Mic, 24V Phantom, High-Pass Filter, 10 dB Pad
	100Hz HPF		In/Out
	External Volume Control		3 Position Phoenix
	Fault: Relay		2 Position Phoenix

### Mains Power

	AC	100Hz – 240HzVAC	50/60 Hz 110W
	DC	24V	

### Dimensions (inches)

H x W x D	with feet	4.0 x 17.25 x 14.6
	w/o feet	3.5 x 17.25 x 14.6

### Dimensions (millimeters)

H x W x D	with feet	102 x 483 x 381
	w/o feet	88 x 483 x 381

### Weight (approximate net lb/kg)

	17.7	7.9
--	------	-----

### Shipping weight (lb/kg)

	22.8	10.2
--	------	------

### Operating temperature range

	-10°C to 45°C, 14°F to 113°F	
--	------------------------------	--

### EMC STANDARDS:

U.S. - part 15 of the FCC Rules, EN55103-1, EN55103-2, EN55022 (Emissions), EN55024 (Immunity)

Canada - ICES-003

### SAFETY STANDARDS:

cTUVus, cULus (pending), KETI, C-Tick N484, PSE

### ORDERING DATA:

P/N 0020861

