



# TECHNICAL SPECIFICATIONS BV625

## DESCRIPTION

A dedicated bass system housed in rectangular enclosure. Includes 2x 15-in woofers in separate vented subenclosures.

## APPLICATIONS


The BV625 uses enclosure venting to extend LF response and minimize distortion from excessive driver excursion. Identical in height to the MH690iE, the compact, high output LF system is typically used with MH or CH Series mid/high modules to create true 3-way arrays in large format installations. It is effective wherever high output, extended range LF response is needed. Six Year Warranty.

Applications include:

- Corporate Events
- Large Theaters
- Stadiums
- Arenas
- Large HOW's
- Dance Clubs

## DESCRIPTIVE DATA

Part Number	999155
Product Group	M
Components & Loading	2x 15-in, Vented
System Configuration	Dedicated LF System
Recommended High-Pass Frequency (24 dB/Octave)	35Hz
Cabinet Type (shape)	Rectangular
Enclosure Materials	Baltic Birch Plywood
Finish	Black Catalyzed Polyurethane
Connectors	4-Terminal Barrier Strip
Suspension Hardware	(16) 3/8"-16 threaded mounting/suspension points (4 each top, bottom and sides)
Grill	Vinyl Coated Perforated Steel

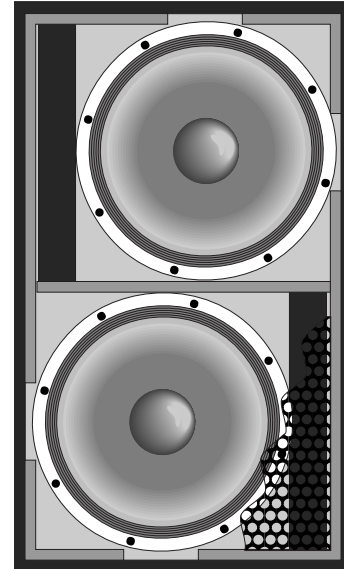

## NOMINAL DATA


Frequency Response (Hz)	$\pm 3$ dB	50Hz to 500Hz	
	-10 dB	35Hz	
	Axial Sensitivity (dB SPL/1 Watt/1m)		
			101
Impedance (Ohms)			4 or 2x 8
Power Handling (Watts)			AES Standard 1000
Calculated Maximum Output (dB SPL, @1m)			Peak 137
			Long Term 131
Dimensions		<b>inches</b>	<b>millimeters</b>
	Height	33.25	845
	Width	19.75	502
	Depth	24.63	626
Weights		<b>pounds</b>	<b>kilograms</b>
	Net Weight	125	56.9
	Shipping Weight	130	59.2





# TECHNICAL SPECIFICATIONS BV625

## DIMENSIONAL DRAWING

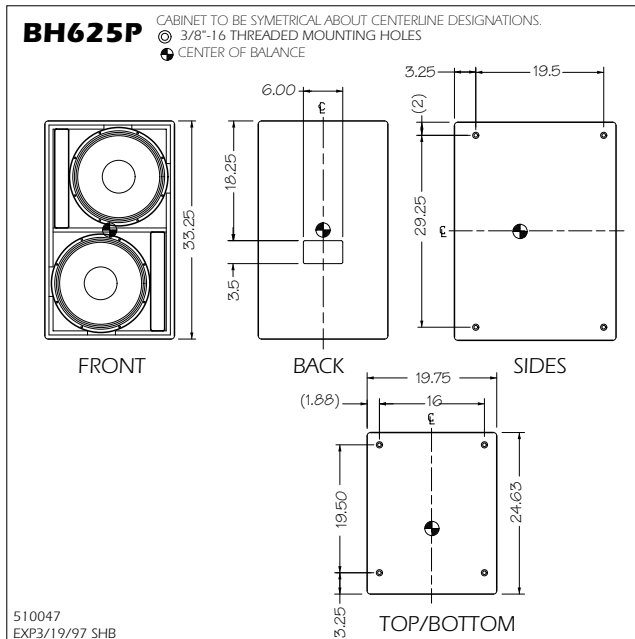

## SERVICE ITEMS

### LF: Complete Cone Driver

EAW Part No. 804071

### Filter/Crossover Network: Complete Assembly

EAW Part No. 201353

## ARCHITECTURAL SPECIFICATIONS

The low frequency loudspeaker systems shall incorporate 2x 15-in LF transducers. Each LF driver shall be mounted in separate vented subenclosure tuned for optimum low frequency response.

System frequency response shall vary no more than  $\pm 3$  dB from 50 Hz to 500 Hz measured on axis. The loudspeaker shall produce a Sound Pressure Level (SPL) of 101 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 137 SPL on axis at 1 meter. The loudspeaker shall handle 1000 Watts of amplifier power (AES Standard) and shall have a nominal impedance of 4 (2x 8) Ohms.

The loudspeaker enclosure shall be rectangular in shape. It shall be constructed of 15mm thickness void-free cross-grain-laminated Baltic birch plywood and shall employ extensive internal bracing. It shall be finished in black catalyzed polyurethane. Input connectors shall be a four-terminal barrier strip. A total of sixteen 3/8"-16 threaded mounting/suspension points (4 each top, bottom, sides) shall be provided. The front of the loudspeaker shall be covered with a vinyl coated perforated steel grill.

The low frequency loudspeaker shall be the EAW model BV625.