



TECHNICAL SPECIFICATIONS AS592ix

DESCRIPTION

A 3-way full range system housed in a vented rectangular enclosure. Includes a 15-in woofer, a horn-loaded 10-in midrange cone and a 2-in exit compression driver on a 90 x 40 constant directivity horn. Powering mode is biamplified (passive MF/HF crossover).

APPLICATIONS

The AS592ix adapts Virtual Array Technology to a compact rectangular enclosure engineered for permanent installation. True 3-way design dramatically improves the quality of speech reproduction while the cone-driven midrange horn extends pattern control into the lower octaves. A flexible, powerful installation tool with comprehensive 3/8"-16 mounting/suspension points. Six year warranty.

Applications include:

- Stadium
- Arenas
- Concert Halls
- Dance Clubs
- Large HOW's
- Small HOW's



DESCRIPTIVE DATA

Part Number	999169
Product Group	I
LF Subsystem & Loading	1x 15-in, Vented
MF Subsystem & Loading	1x 10-in Horn-Loaded Cone
HF Subsystem & Loading	1x 2-in Exit Compression Driver on Constant Directivity Horn
General System Configuration	3-way, Full Range
Powering Configuration(s)	Biamplified (passive MF/HF crossover)
Recommended High-Pass Frequency (24 dB/Octave)	40Hz
Cabinet Type (shape)	Rectangular
Enclosure Materials	Baltic Birch Plywood
Finish	Black Catalyzed Polyurethane
Connectors	4-terminal barrier strip
Suspension Hardware	(12) 3/8"-16 Threaded Mounting/Suspension Points (4 each top and bottom, 2 per side)
Grill	Vinyl Coated Perforated Steel

NOMINAL DATA


Frequency Response (Hz)	±3 dB	60Hz to 16kHz	
	-10 dB	40Hz	
Axial Sensitivity (dB SPL/1 Watt/1m)	MF/HF	105	
	LF	98	
Impedance (Ohms)	MF/HF	8	
	LF	8	
Power Handling, AES Standard (Watts)	MF/HF	300	
	LF	1000	
Calculated Maximum Output (dB SPL, @ 1m)	MF/HF Peak	135.8	
	LF Peak	134.0	
	MF/HF Long term	129.8	
	LF Long Term	128.0	
Nominal Coverage Angle / -6 dB points (degrees)	Horizontal	90	
	Vertical	40	
Dimensions		inches	millimeters
	Height	22.5	571.5
	Width	41.5	1054.1
Depth	19.75	501.65	
Weights		pounds	kilograms
	Net Weight	172	77.5
	Shipping Weight	176	80.1





TECHNICAL SPECIFICATIONS AS592ix

DIMENSIONAL DRAWING

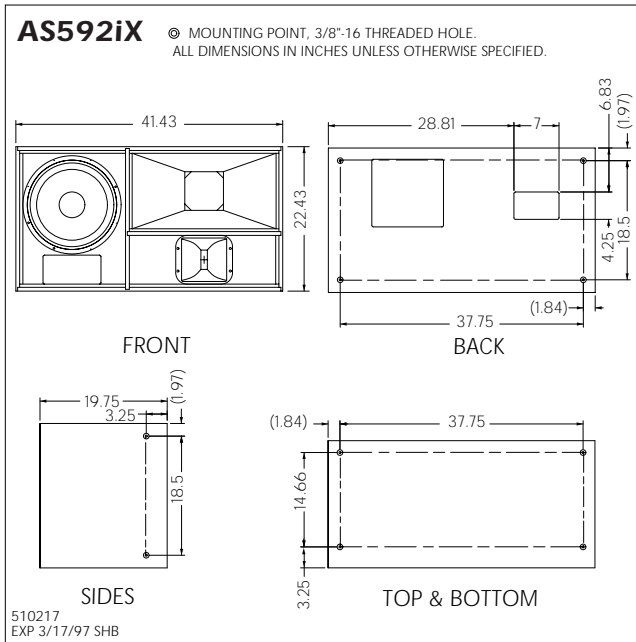

SERVICE ITEMS

LF: Complete Cone Driver	EAW Part No. 804036
MF: Complete Cone Driver	EAW Part No. 804022
HF: Complete Compression Driver/Tweeter	EAW Part No. 803011
Filter/Crossover Network: Complete Assembly	EAW Part No. 225094

ARCHITECTURAL SPECIFICATIONS

The 3-way full range loudspeaker systems shall incorporate a 15-in LF transducer, a 10-in MF transducer and a 2-in exit compression driver HF transducer.

The LF driver shall be mounted in a vented enclosure tuned for optimum low frequency response. The MF driver shall be loaded into a constant horizontal coverage horn constructed of 3mm birch plywood reinforced with high density polyurethane foam. The MF horn shall incorporate a phase/displacement plug. The HF driver shall be loaded on a constant directivity horn with a nominal coverage pattern of 90° (h) x 40° (v). An internal passive filter network shall provide fourth order acoustical crossover and system equalization between the mid and high frequency sections.

System frequency response shall vary no more than ± 3 dB from 60 Hz to 16 kHz measured on axis. The mid/high section shall produce a Sound Pressure Level (SPL) of 105 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 135.8 dB SPL on axis at 1 meter. The low frequency section shall produce a Sound Pressure Level (SPL) of 98 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 134 dB SPL on axis at 1 meter. The mid/high section shall handle 300 Watts of amplifier power (AES Standard) and shall have a nominal impedance of 8 Ohms. The low frequency section shall handle 1000 Watts of amplifier power and shall have a nominal impedance of 8 Ohms.

The loudspeaker enclosure shall be rectangular in shape. It shall be constructed of 15mm thickness void-free cross-grain-laminated Baltic birch plywood and shall employ extensive internal bracing. It shall be finished in black catalyzed polyurethane. Input connectors shall be four-terminal barrier strip. A total of 12x 3/8"-16 threaded mounting/suspension points (4 each top and bottom, 2 per side) shall be provided. The front of the loudspeaker shall be covered with a vinyl coated perforated steel grill.

The 3-way full range loudspeaker shall be the EAW model AS592ix.