


SPECIFICATIONS

Model:	CAM120	T.h.d.:	Less than 0.5% at 1KHz, 1/3 rated power
Rated Power Output:	120W	Crosstalk:	Less or equal to 50dB
Speaker Outputs:	4~16 Ohms, 70/100V	Muting Function:	MIC 1 Priority overrides other input signals with 0~30dB attenuation.
Input:	<ul style="list-style-type: none"> MIC 1: 5mV/600 Ohms Unbalanced TRS input MIC 2/3: 5mV/600 Ohms Unbalanced TRS/XLR input MIC 2/3: LINE: 775mV/10K Ohms Unbalanced RCA input AUX 1/2: 350mV/10K Ohms Unbalanced RCA input EMC: 775mV/10K Ohms, Unbalanced Input 	Controls:	Individual gain controls, power switch, EQ, master output levels.
EQ:	Bass: +/-10dB at 100Hz Treble: +/-10dB at 10KHz	Cooling:	The built-in cooling fan automatically starts when the temperature inside power supply reaches 55° Celcius.
Frequency Responce:	50Hz~16KHz	Protection:	Overheating protection, short circuit protection and overcurrent protection
S/n ratio:	MIC 1, 2, 3: 66dB; AUX 1.2: 80dB	Power Requirements:	~220-240V 50/60Hz
		Power Consumption:	200W
		Dimension (mm):	484 x 385 x 88
		Net Weight:	9.3Kg
		Gross Weight:	9.7Kg
		Fuse:	3.15A L 250V

BLOCK DIAGRAM

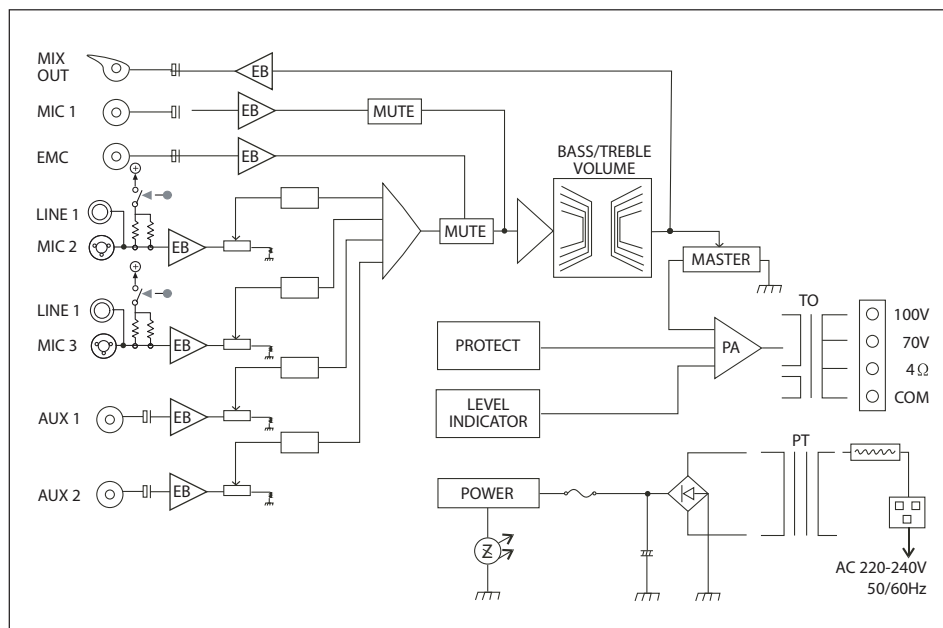

REAR PANEL

POWER INPUT (IEC C14)

POWER SWITCH

USB TYPE-C PORT

48V PHANTOM POWER SWITCH

MUTE SWITCH

MIC 2 (XLR)

MIC 3 (XLR)

MIC 2 (1/4" TRS)

MIC 3 (1/4" TRS)

MIC 2 (1/8" TRS)

MIC 3 (1/8" TRS)

LINE OUTPUT (1/4" TRS)

CE MARK

ROHS MARK

POWER SYMBOL

SERIAL NUMBER LABEL

MANUFACTURED IN CHINA • CABLE TECHNOLOGIES INC. "U-Phoria" IS A REGISTERED TRADEMARK OF CABLE TECHNOLOGIES INC.

[illegible]