

## APPLICATION

- For subwoofer channel of cinema soundtrack
- THX® approved

## PRODUCT INFORMATION

The SB284C cinema subwoofer loudspeaker system uses dual 18-in cone transducers each mounted in its own optimally vented sub-enclosure to fill large capacity theaters theaters with high definition sub bass information at earth-shaking output levels. This system has been approved by the THX® division of Lucasfilm, Ltd., for use in THX certified theaters.

The SB284C's optimally vented enclosure uses enclosure resonance to increase sub bass response while limiting driver excursion. This method produces less distortion and minimizes driver strain while extending sub bass response to the lower limits of human hearing. Special effects will have greater clarity, greater power and greater impact.


Each 18-in woofer is individually accessible via a two-terminal barrier strip, which accommodates bare wire, tinned leads or spade lugs, located on the side of the enclosure for convenient access in cramped installation areas.

The use of multiple SB284C's provides even greater output capability and further extends low frequency response.



## DESCRIPTIVE DATA

Part Number	999082	
Sub System & Loading	2x 18-in, vented	
System Crossover	100 Hz recommended	
Recommended High-Pass Frequency (24 dB/octave)	20 Hz	
Cabinet Type (shape)	Rectangular	
Enclosure Materials	3/4-in Medium Density Fiberboard, 15 mm birch baffle	
Finish	Textured black	
Connectors	Dual-terminal barrier strips	
Grille	Vinyl coated perforated steel	
Dimensions	inches	millimeters
	Height	29.75      756
	Width	48.25      1226
	Depth	23.75      603
Weights	pounds	kilograms
	Net Weight	218      98.9
	Shipping Weight	233      105.7

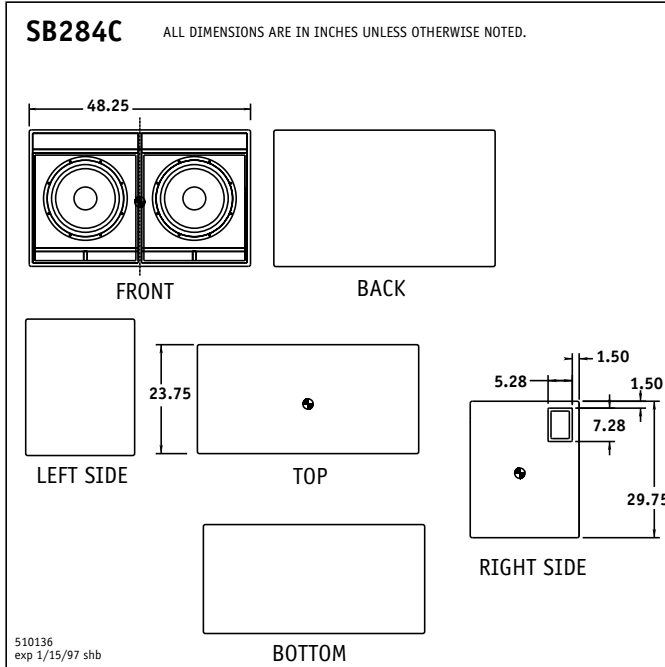

## COMPONENTS & CONSTRUCTION

The SB284C is a high output, extended bandwidth subwoofer optimized specifically for cinema use. It features dual high power 18-in low frequency transducers, each mounted in its own optimally vented subenclosure.

The enclosure is constructed of 3/4-in Medium Density Fiberboard except for the baffle plate which is 15mm, void-free, cross-grain-laminated birch plywood. Extensive internal bracing is employed to minimize panel resonances resulting from the large acoustical energies generated within the enclosure and maximize acoustical energy transfer.

Input connectors are 2-terminal barrier strip, designed to accommodate bare wire, tinned leads or spade lugs.

All external components feature a textured black finish to eliminate the reflection of light through perforated cinema screens.

## NOMINAL DATA

<b>Frequency Response</b>	_____
±3 dB	30 Hz - 300 Hz
<b>Axial Sensitivity (dB SPL, 1 Watt @ 1m)</b>	_____
	99
<b>Impedance (Ohms)</b>	_____
	4
<b>Power Handling, AES Standard (Watts)</b>	_____
	1600
<b>Calculated Maximum Output (dB SPL @ 1m)</b>	_____
Peak	137.0
Long Term	131.0